




## Bearing de Mexico, S.A.

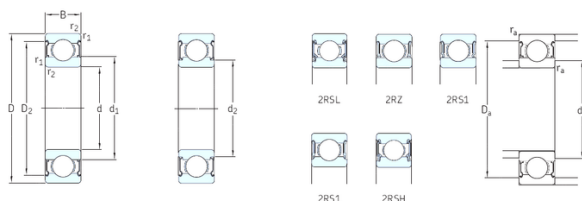

15 mm x 24 mm x 5 mm SKF 61802-2RS1 deep groove ball bearings

Bearing No. 61802-2RS1

61802-2RS1 Bearing 2D drawings and 3D CAD models

Size	15x24x5 mm
Bore Diameter	15 mm
Outer Diameter	24 mm
Width	5 mm
d	15 mm
D	24 mm
B	5 mm
C	5 mm
d1	17,8 mm
d2	– mm
r1 min.	17 mm
r2 min.	17 mm
D1	22,2 mm
D2	0,3 mm
da min.	17,8 mm
Da max.	22 mm
ra max.	0,3 mm
Weight	0,0074 Kg
Basic dynamic load rating (C)	1,9 kN
Basic static load rating (C0)	1,1 kN
Fatigue load limit (Pu)	0,048
Reference speed	– r/min
Limiting speed	17000 r/min
Calculation factor (f0)	14
Category	Single Row Ball Bearings



## Bearing de Mexico, S.A.

Inventory	8.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.009
EAN	7316577611529
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	15MM Bore; 24MM Outside Diameter; 5MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	61802 2RS1
Weight / LBS	0.02
Outside Diameter	0.945 Inch   24 Millimeter
Bore	0.591 Inch   15 Millimeter



## Bearing de Mexico, S.A.

Outer Race Width	0.197 Inch   5 Millimeter
bore diameter:	15 mm
static load capacity:	1.1 kN
outside diameter:	24 mm
precision rating:	Not Rated
overall width:	5 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
outer ring width:	5 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	0.3 mm
internal clearance:	C0
maximum rpm:	17000 RPM
operating temperature range:	-40 to +210 ° F
series:	61
dynamic load capacity:	1.9 kN
$d_1$	17.8 mm
$d_2$	0 mm
$D_2$	0 mm
$r_{1,2}$ min.	0.3 mm
$d_a$ min.	17 mm
$d_a$ max.	17.8 mm
$D_a$ max.	22 mm
$r_a$ max.	0.3 mm
Basic dynamic load rating C	1.9 kN
Basic static load rating $C_0$	1.1 kN
Fatigue load limit $P_u$	0.048 kN
Calculation factor $k_r$	0.015
Calculation factor $f_0$	13.8
Mass bearing	0.0074 kg



**Bearing de Mexico, S.A.**