




Bearing de Mexico, S.A.

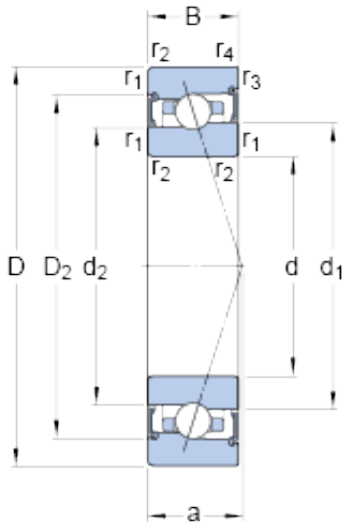

120 mm x 165 mm x 22 mm SKF S71924 CB/P4A angular contact ball bearings

Bearing No. S71924 CB/P4A

S71924 CB/P4A Bearing 2D drawings and 3D CAD models

Size	165x120x22 mm
Bore Diameter	165 mm
Outer Diameter	120 mm
Width	22 mm
d	120 mm
D	165 mm
B	22 mm
d ₁	136.92 mm
d ₂	135 mm
D ₂	151.9 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	34.2 mm
d _a - min.	126 mm
d _a - max.	136.2 mm
d _b - min.	126 mm
d _b - max.	134.3 mm
D _a - max.	159 mm
D _b - max.	161.8 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	27 kN
Basic static load rating - C ₀	30.5 kN
Fatigue load limit - P _u	1.1 kN



Bearing de Mexico, S.A.

Limiting speed for grease lubrication	10000 r/min
Ball - D_w	8.731 mm
Ball - z	41
Calculation factor - f_0	10
Preload class A - G_A	90 N
Preload class B - G_B	180 N
Preload class C - G_C	540 N
Calculation factor - f	1.13
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.07
Calculation factor - f_{HC}	1
Preload class A	71 N/micron
Preload class B	94 N/micron
Preload class C	150 N/micron
d_1	136.92 mm
d_2	135 mm
D_2	151.9 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	126 mm
d_a max.	136.2 mm
d_b min.	126 mm
d_b max.	134.3 mm
D_a max.	159 mm
D_b max.	161.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	36.4 kN



Bearing de Mexico, S.A.

Basic static load rating C_0	48 kN
Fatigue load limit P_u	1.08 kN
Attainable speed for grease lubrication	10000 r/min
Ball diameter D_w	8.731 mm
Number of balls z	41
Preload class A G_A	90 N
Static axial stiffness, preload class A	71 N/ μ m
Preload class B G_B	180 N
Static axial stiffness, preload class B	94 N/ μ m
Preload class C G_C	540 N
Static axial stiffness, preload class C	150 N/ μ m
Calculation factor f	1.13
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.07
Calculation factor f_{HC}	1
Calculation factor f_0	10
Mass bearing	1.31 kg