




Bearing de Mexico, S.A.

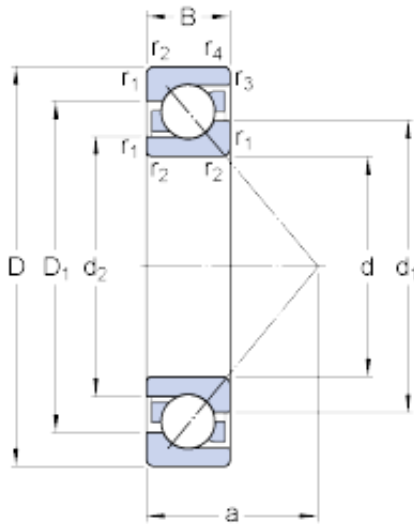

50 mm x 110 mm x 27 mm SKF 7310 BECBP angular contact ball bearings

Bearing No. 7310 BECBP

7310 BECBP Bearing 2D drawings and 3D CAD models

Size	110x50x27 mm
Bore Diameter	110 mm
Outer Diameter	50 mm
Width	27 mm
d	50 mm
D	110 mm
B	27 mm
d ₁	73.8 mm
d ₂	61.13 mm
D ₁	88.8 mm
a	47 mm
r _{1,2} - min.	2 mm
r _{3,4} - min.	1 mm
d _a - min.	61 mm
D _a - max.	99 mm
D _b - max.	104 mm
r _a - max.	2 mm
r _b - max.	1 mm
Basic dynamic load rating - C	75 kN
Basic static load rating - C ₀	51 kN
Fatigue load limit - P _u	2.2 kN
Reference speed	8000 r/min
Limiting speed	8000 r/min
Calculation factor - k _r	0.1



Bearing de Mexico, S.A.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	4.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.04
EAN	7316577092526
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	CB
Number of Bearings	1 (Single)
Mounting Arrangement	Universal
Inch - Metric	Metric



Bearing de Mexico, S.A.

Long Description	50MM Bore; 110MM Outside Diameter; 27MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Normal Axial Internal Clearance
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7310 BECBP
Weight / LBS	2.288
Outside Diameter	4.331 Inch 110 Millimeter
Bore	1.969 Inch 50 Millimeter
Width	1.063 Inch 27 Millimeter
bore diameter:	50 mm
radial static load capacity:	51 kN
outside diameter:	110 mm
cage material:	Nylon
overall width:	27 mm
outer ring width:	27 mm
contact angle:	40 °
maximum rpm:	8000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	ABEC 3 (ISO Class 6)
closure type:	Open
fillet radius:	2 mm



Bearing de Mexico, S.A.

radial dynamic load capacity:	75 kN
series:	73
d_1	73.8 mm
d_2	61.13 mm
D_1	88.8 mm
$r_{1,2}$ min.	2 mm
$r_{3,4}$ min.	1 mm
d_a min.	61 mm
D_a max.	99 mm
D_b max.	104 mm
r_a max.	2 mm
r_b max.	1 mm
Basic dynamic load rating C	75 kN
Basic static load rating C_0	51 kN
Fatigue load limit P_u	2.16 kN
Calculation factor A	0.0418
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	1.1 kg