




## Bearing de Mexico, S.A.

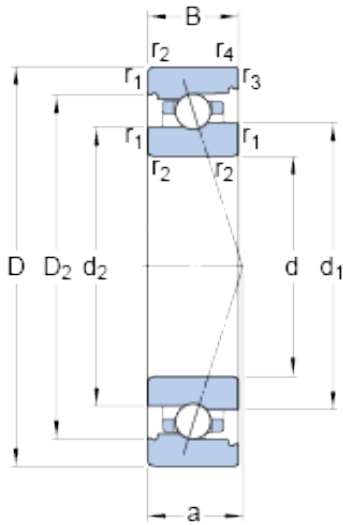

71906 ACB/P4A Bearing 2D drawings and 3D CAD models

### 30 mm x 47 mm x 9 mm SKF 71906 ACB/P4A angular contact ball bearings

Bearing No. 71906 ACB/P4A

Size	47x30x9 mm
Bore Diameter	47 mm
Outer Diameter	30 mm
Width	9 mm
d	30 mm
D	47 mm
B	9 mm
d <sub>1</sub>	35.95 mm
d <sub>2</sub>	35.1 mm
D <sub>2</sub>	43 mm
r <sub>1,2</sub> - min.	0.3 mm
r <sub>3,4</sub> - min.	0.15 mm
a	16.5 mm
d <sub>a</sub> - min.	32 mm
d <sub>b</sub> - min.	32 mm
D <sub>a</sub> - max.	45 mm
D <sub>b</sub> - max.	46.2 mm
r <sub>a</sub> - max.	0.3 mm
r <sub>b</sub> - max.	0.15 mm
d <sub>n</sub>	36.6 mm
Basic dynamic load rating - C	4.6 kN
Basic static load rating - C <sub>0</sub>	3 kN
Fatigue load limit - P <sub>u</sub>	0.127 kN
Limiting speed for grease	36000 r/min



## Bearing de Mexico, S.A.

Lubrication	
Limiting speed for oil lubrication	56000 mm/min
Ball - $D_w$	3.969 mm
Ball - $z$	22
$G_{ref}$	0.72 cm <sup>3</sup>
Calculation factor - $e$	0.68
Calculation factor - $Y_2$	0.87
Calculation factor - $Y_0$	0.38
Calculation factor - $X_2$	0.41
Calculation factor - $Y_1$	0.92
Calculation factor - $Y_2$	1.41
Calculation factor - $Y_0$	0.76
Calculation factor - $X_2$	0.67
Preload class A - $G_A$	27 N
Preload class B - $G_B$	54 N
Preload class C - $G_C$	160 N
Calculation factor - $f$	1.07
Calculation factor - $f_1$	0.99
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.02
Calculation factor - $f_{2C}$	1.07
Calculation factor - $f_{HC}$	1
Preload class A	53 N/micron
Preload class B	68 N/micron
Preload class C	102 N/micron
$d_1$	35.95 mm
$d_2$	35.1 mm
$D_2$	43 mm
$r_{1,2}$ min.	0.3 mm



## Bearing de Mexico, S.A.

$r_{3,4}$ min.	0.15 mm
$d_a$ min.	32 mm
$d_b$ min.	32 mm
$D_a$ max.	45 mm
$D_b$ max.	46.2 mm
$r_a$ max.	0.3 mm
$r_b$ max.	0.15 mm
$d_n$	36.6 mm
Basic dynamic load rating C	6.05 kN
Basic static load rating $C_0$	4.9 kN
Fatigue load limit $P_u$	0.127 kN
Attainable speed for grease lubrication	36000 r/min
Attainable speed for oil-air lubrication	56000 r/min
Ball diameter $D_w$	3.969 mm
Number of balls z	22
Reference grease quantity $G_{ref}$	0.72 cm <sup>3</sup>
Preload class A $G_A$	27 N
Static axial stiffness, preload class A	53 N/ $\mu$ m
Preload class B $G_B$	54 N
Static axial stiffness, preload class B	68 N/ $\mu$ m
Preload class C $G_C$	160 N
Static axial stiffness, preload class C	102 N/ $\mu$ m
Calculation factor f	1.07
Calculation factor $f_1$	0.99
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.02
Calculation factor $f_{2C}$	1.07
Calculation factor $f_{HC}$	1



## Bearing de Mexico, S.A.

Calculation factor e	0.68
Calculation factor (single, tandem) $Y_2$	0.87
Calculation factor (single, tandem) $Y_0$	0.38
Calculation factor (single, tandem) $X_2$	0.41
Calculation factor (back-to-back, face-to-face) $Y_1$	0.92
Calculation factor (back-to-back, face-to-face) $Y_2$	1.41
Calculation factor (back-to-back, face-to-face) $Y_0$	0.76
Calculation factor (back-to-back, face-to-face) $X_2$	0.67
Mass bearing	0.047 kg